

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199859441 B2
(10) Patent No. 734061

(54) Title
tapering of sheet material

(51)⁶ International Patent Classification(s)
B21D 005/08

(21) Application No: 199859441 (22) Application Date: 1998.03.23

(30) Priority Data

(31) Number (32) Date (33) Country
PO5881 1997.03.26 AU

(43) Publication Date : 1998.10.01
(43) Publication Journal Date : 1998.10.01
(44) Accepted Journal Date : 2001.05.31

(71) Applicant(s)
BHP Steel (JLA) Pty Ltd

(72) Inventor(s)
Campbell John Seccombe; Graeme Muir

(74) Agent/Attorney
FREEHILLS CARTER SMITH BRADLE, Level 43, 101 Collins Street, MELBOURNE VIC 3000

(56) Related Art
AU 36801/97
AU 40882/96
AU 59702/86

BEST AVAILABLE COPY

JAP6 Rec'd PCT/PTO 18 AUG 2006

R01P01C067000149

ABSTRACT

5 A rollforming unit includes a supporting body and a pair of guide roll means mounted in the body for rotation on respective axes. This means includes at least two cooperating pairs of guide rolls for engaging respective ribs of a ribbed formable sheet to guide the sheet through the unit. Rib formation roll means is mounted for rotation in the body and located to engage a pan of the ribbed formable sheet as it passes through the unit for forming a longitudinally extending rib or ribs in the pan of increasing height, thereby

10 causing the sheet to be tapered. At least some of the guide rolls are slidably mounted on first spindle means and the rib formation roll means includes at least one rib formation roll slidably mounted on second spindle means. The unit further includes means for controllably and progressively relatively moving the slidably mounted rolls along the spindle means to accommodate the tapering of the sheet.

15



10/590183

IAP6 Rec'd PCT/PTO 18 AUG 2006

P100/011
Regulation 3.2

AUSTRALIA

Patents Act 1990

**ORIGINAL
COMPLETE SPECIFICATION
STANDARD PATENT**

Invention Title: Tapering of sheet material

The following statement is a full description of this invention, including the best method of performing it known to us:

7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2

5

TAPERING OF SHEET MATERIAL

This invention relates to the tapering of rollformed sheet material and has particular though not exclusive application to the formation of tapered forms of the ribbed steel panels commonly used in roofing.

10

Steel roofing panels are conventionally supplied in a variety of standard lengths, and are provided with longitudinally extending ribs by progressive cold working in a sequence of rollforming stations. Ribbed panels formed in this way may be many metres in length, and typically have rib formations along their side edges which overlap with
15 complementary formations on adjacent panels. There is usually at least one large longitudinally extending intermediate rib and the intervening pans between the major ribs may have shallow ribs for strengthening or decorative purposes.

20

These conventional forms of ribbed panel are not well suited to roofs of curved configuration, for which panels must be cut to shape and spaces infilled by sheet segments. Stretched membrane configurations have been used for more elaborate roof structures, but ribbed steel panels could often be employed if it were possible to practically and economically produce longitudinally tapered forms of the panels.

25

Australian patent 576300 describes an apparatus for forming tapered metal sheets employing a sequence of eccentrically mounted forming rolls which act from underneath the sheet to form in each pan a longitudinally extending domed section of increasing height. The lateral drawing of the material of the pan into this domed section causes the side edge ribs to draw closer together, thereby tapering the panel.

30

The apparatus of patent 576300 requires multiple rollforming stations, and the eccentric mounting of the forming rolls causes additional vibration and noise.

It is an object of the invention to provide one or more novel rollforming arrangements by which tapered panels may be formed from sheet material in a practical and effective manner without incurring the aforementioned disadvantages of the apparatus described in patent 576300.

5

In the first aspect, the invention provides a rollforming unit, including:

a supporting body;

a pair of guide roll means mounted in said body for rotation on respective axes, which means includes at least two cooperating pairs of guide rolls for
10 engaging respective ribs of a ribbed formable sheet to guide the sheet through the unit;

rib formation roll means mounted for rotation in said body and located to engage a pan of the ribbed formable sheet as it passes through the unit for forming a longitudinally extending rib or ribs in the pan of increasing height, thereby causing
15 the sheet to be tapered;

wherein at least some of the guide rolls are slidably mounted on first spindle means and the rib formation roll means includes at least one rib formation roll slidably mounted on second spindle means;

and wherein the unit further includes means for controllably and progressively relatively moving the slidably mounted rolls along said spindle means to accommodate the tapering of the sheet.
20

For tapering a sheet having three ribs, two of which may typically be at the side edges of the sheet, there are preferably three guide rolls, the centre one of which is axially
25 fixed with respect to said first spindle means and the other two of which are slidably mounted on the first spindle means.

Preferably, the arrangement of guide rolls provides support for the ribbed sheet at both sides of the or each pan engaged by a rib formation roll. To this end, the guide roll
30 means includes follower guide rolls rotatable on an axis displaced from said first spindle means, which follower guide rolls engage and are mounted to follow the slidably mounted

guide rolls. The sheet is supported between these follower guide rolls and the slidably mounted guide rolls.

Advantageously, the aforementioned axially fixed guide roll has a cooperating
5 guide roll mounted on a bridge extending longitudinally of the unit.

The guide rolls may be integral rolls or formed in plural parts e.g. a pair of discs defining between them a peripheral rib-receiving groove.

10 Preferably, there are two rib formation rolls for each pan of the sheet, slidably mounted on the second spindle means. Advantageously, there is a further rib formation roll for each pan slidably mounted on the first spindle means and cooperable with the earlier mentioned rib formation rolls in forming two ribs of increasing height in the sheet pan.

15 Conveniently, the slidable mounting of the slidably mounted rolls is effected by fixing them on respective sleeves, e.g. extending towards one or other end of the associated spindle means. In a case of more than one slidably mounted roll to a given side of the centre point of a spindle means, the sleeve for the innermost roll extends within the
20 sleeve(s) for the more outer roll(s).

Slidable movement of the rolls on the spindle means is preferably effected by respective motor-driven screw actuators. Preferably, each sleeve is carried by a yoke moved by a pair of screw actuators. Preferably, separate motors are provided for the rolls
25 of the respective spindle means, each motor being associated with a single belt drive arranged to provide the different relative speeds of the sleeves.

In a second aspect, the invention provides a roll forming unit, including:
a supporting body;
30 a pair of guide roll means mounted in said body for rotation on respective axes, which means includes at least two cooperating pairs of guide rolls for

engaging respective ribs of a ribbed formable sheet to guide the sheet through the unit;

5 rib formation roll means mounted for rotation in said body and located to engage a pan of the ribbed formable sheet as it passes through the unit for forming a longitudinally extending rib or ribs in the pan of increasing height, thereby causing the sheet to be tapered;

 wherein said rib formation roll means includes at least one rib formation roll mounted in a sub-body moveably supported on said body;

10 and wherein means is provided to controllably and progressively move the sub-body so as to correspondingly adjust the position of at least one rib formation roll to effect the longitudinally increasing height of said rib(s) in the pan.

15 Preferably, the sub-body is moveably supported on the body by being pivotally mounted about an axis which is substantially in the plane of travel of the ribbed sheet through the unit, whereby to minimise longitudinal displacement of the roll tips relative to the sheet with movement of the sub-body.

20 Preferably, the unit further includes respective sets of feed and exit rolls and an associated motor for rotating these rolls and so moving the ribbed sheet through the unit.

 In a preferred embodiment, the invention provides, in the one rollforming unit, the features of both the first and second aspects of the invention.

25 The invention also provides, in a third aspect, a ribbed metal sheet having a plurality of longitudinally extending pans separated by ribs, wherein each pan includes a pair of longitudinally extending ribs of progressively increasing height, and wherein the sheet is of progressively decreasing width matching the increasing rib height. The ribs of progressively increasing height are preferably substantially V-shaped or triangular in cross section.

30

 The invention will now be further described by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a diagrammatic side elevation of a rollforming unit according to an embodiment of both aspects of the invention;

Figure 2 is a vertical cross-section on the line 2-2 on the axes of the respective main roll spindles, with the rolls shown in the pre-taper positions on the right and in their full taper positions on the left;

Figure 3 is a somewhat diagrammatic feed end elevation of the rollforming unit showing only selected components;

Figure 4 is a fragmentary view of one of the four pairs of yokes which carry the slidable rolls;

Figure 5 is a three-dimensional view of a tapered ribbed sheet formed by the unit, together with end elevations and cross-sections where indicated; and

Figure 6 is a diagram showing the control and drive links between the motors and the principal moving components.

The illustrated rollforming unit 10 includes a main body or frame 12 that supports respective sub-bodies comprising an upper sub-frame 14 and a lower sub-frame 15. Sub-frames 14,15 respectively carry an upper roll spindle 16 and lower roll spindle 17. Main frame 10 also mounts driven sets of feed rolls 18 and exit rolls 19, which define a pass plane 20 for a ribbed sheet or panel as it is driven through the unit. The sub-frames 14,15 are between the exit and feed roll sets relative to the direction of sheet travel.

Upper sub-frame 14 is fixed so as to be stationary on main frame 12, whereas lower sub-frame 15 is pivotally mounted at its downstream end on an axis 22, which lies close to and just above plane 20 and extends normal to the direction of sheet travel. At its upstream end, sub-frame 15 sits atop screw jacks 24 (Figure 3), 25 for vertical adjustment of the sub-frame.

As will be discussed in detail, roll spindles 16,17 include various guide and rib formation rolls. Most of these rolls are slidably mounted on the spindles by being attached to sleeves carried by one or other of crossed pairs of yokes 30,31 (Figure 4) at each side of the pass plane. These yokes 30,31 are driven progressively transversely towards or away

from each other by respective pairs of screw actuators 40,41; 42,43 mounted in each sub-frame. Each sub-frame carried a respective motor 46,47 for driving the screw actuators.

5 The illustrated rollforming unit 10 is configured to taper a particular style of ribbed steel sheet or panel commonly employed in roofing. This panel has three longitudinally extending ribs, one along the centre line and the others at the side edges, joined by a pair of flat pans. It can come in lengths up to 10 metres or more. The unit 10 is designed to form two longitudinally extending ribs in each pan, of progressively increasing height, thereby drawing in material laterally and causing the sheet to be longitudinally tapered. An
10 example of the resultant sheet is illustrated in Figure 5 : the three conventional ribs are indicated at 8, the pans at 9, and the ribs of increasing height at 7. The ribs 7 are substantially V-shaped or triangular in cross-section.

15 Main frame 12 is a three dimensional rectangular array of heavy duty box-section steel girders. These include a pair of longitudinally extending upper beams 50,51 atop three spaced legs 52, having base pads 53 and joined by lower longitudinal beams 54. Upper beams 50,51 and legs 52 are in turn linked by a number of cross beams 56 indicated by broken line outlines in Figure 1. Beams 50,51 overhang the legs 52 at the feed end to support feed roll set 18, while exit roll set 19 is carried by upper beams 50,51 just upstream
20 of the middle leg. The rolls of sets 18,19 are not depicted in detail, but comprise any suitable arrangement to drive and guide ribbed panels along pass plane 20. The rolls of feed roll set 18 and exit roll set 19 are driven from a motor 45 via a longitudinally extending drive shaft 58, respective gear boxes 59a,59b, and drive belts 55.

25 The configuration of guide rolls and rib formation rolls is best seen in the cross sectional view of Figure 2. Each of the spindles 16,17 is of solid steel, turned to provide the profiles illustrated in the drawings. Each is rotationally supported by roller bearings 70a,70b in end block assemblies 72a,72b by which they are detachably mounted in cut-outs 73 of side plates 74,75; 84,85 of the respective sub-frames 14,15.

30 Upper roll spindle 16, which does not move vertically, has three guide rolls 101,102,103, each of double disc construction, and a pair of rib formation rolls 111,112

5 Roll 102 thereby rotates with the spindle.

transversely of the unit and engage a yoke at each side : opposite movement of the yokes is achieved by opposite hand threads.

Rotation of the rods draws the sleeves or ferrules of the yokes along the rods. As
5 will be better understood shortly, when the roll forming unit is in operation, the rolls
carried by the inner and longer sleeves need to travel faster along the spindles than the rolls
carried by the outer and shorter sleeves. Thus, the outer yokes 31 must be driven by their
actuators at a higher speed than the inner yokes 30. This is achieved by means of primary
drive belt 150 at one side of each sub-frame that links motor 46 or 47 to sprockets on lower
10 rods 140 in the appropriate speed ratio (discussed further below). Motors 46,47 are
mounted to one of the side plates (74), while adjacent the other side plates (75) are crossed
belts (not shown) that link the lower screw rods to the opposite upper screw rod of the
same yoke in a 1:1 ratio.

15 The ribbed metal sheet is supported and guided between the guide rolls
101,102,103 and respective underlying follower rolls 104,105,106. The central follower
roll 105 is a pair of roller bearings carried on a hub 162 centrally of a longitudinally
extending bridge 160 forming part of the upper sub-frame 14. The outer follower rolls
104,106 are rotatably supported on respective secondary spindles 162a,162b. These
20 spindles can freely move transversely of the direction of travel and are slidably supported
to this end in longitudinally extending side bridges 164a,164b. Rolls 104,106 track
transversely with rolls 101,103 by virtue of a respective peripheral lip 166 on rolls 104,106
which engages rib guiding groove 121a of the overlying roll 101,103. The dimensions are
such that both the lip 166 and the rib of the metal sheet can engage groove 121a side-by-
25 side without risk of seizure.

The facility to progressively raise sub-frame 15 towards sub-frame 14 has already
been noted. The pivotal mounting of the lower sub-frame on axis 22 in the pass plane 20 is
achieved by suspending end portions 85a of side plates 84,85, on stub axles 182,183 of
30 respective support units 180,181 mounted atop main frame beams 50,51. The vertical
adjustment of the lower sub-frame is achieved by a pair of screw jacks 24,25 affixed on a
cross beam 56a and driven by screw jack motor 48.

The operation of the unit to form tapered ribbed steel sheet will now be described. A three ribbed panel or sheet of the form earlier described is introduced to the feed rollers and driven along the pass plane 20. The sheet may typically be surface treated, eg. a galvanised, zincalume coated, colorbond or painted steel sheet. The ribs 8 (Figure 5) of the panel engage and rotate the guide rolls 101-106. The panel moves through the unit as sub-frame 15 is controllably and progressively raised by the action of motor 48 on screw jacks 24,25. Lower rib formation rolls 113-116 are thereby steadily uplifted and cooperate with the upper rib formation rolls 111,112 to engage and deform the pans of the sheet to form longitudinally extending ribs 7 (Figure 5), two in each pan, of progressively increasing height. The resultant lateral drawing of material in turn causes a narrowing, i.e. tapering, of the panel. The narrowing of the sheet is accommodated by the action of motors 46,47, which, through screw actuators 40-43, progressively and controllably drive the various slidably mounted rolls inwardly towards each other. It is thought that this action should be a driven and positive action rather than simply a follower action as the sheet narrows, in order to ensure maximum control of the process. For similar reasons, it is thought desirable to properly support the sheet to each side of the rib formation regions by the lower guide rolls 104,105,106 as well as main upper guide rolls 101,102,103.

There will of course be a limitation on the amount of taper which can be formed in a single pass of unit 10 without incurring undesirable damage in the metal sheet, e.g. fracturing or unacceptable deformation. Multiple passes will usually be required to achieve high angle tapers, with each successive pass further increasing the maximum height of the formed ribs 7 and further reducing the width of the sheet at the narrow end.

It will be appreciated that the motors 45-48 will typically be controlled by associated programmable logic control equipment under software control. Such equipment will include a keyboard and monitor by which appropriate parameters can be entered for each sheet (e.g. the desired taper per unit length and sheet travel speed) to determine the speed of motor 46, which in turn is linked to the other components according to the control and drive links, and ratios, depicted in Figure 6. The mentioned electronic cam is based on

a table derived from forming geometry. Such control technology is generally well known in the rollforming art.

The innermost position of the slidable rolls is shown at the left in Figure 2. This of course determines the minimum width of the tapered panel at its narrower end. It will be seen that the capacity to crowd the rolls to optimise the extent of tapering achievable is facilitated by careful design of the rolls. The inner faces of lower rib formation rolls 114,115 each have a shallow annular groove 130 to accommodate the hub 162 supporting the roller bearings forming centre follower roll 105. The peripheral tips of all of the rib formation rolls are tapered radially and rounded for optimum forming characteristics, and also so as to physically interleave to allow minimisation of the pan width at maximum taper. To further reduce the risk of cracking, the rib formation rolls are of so-called soft rollforming material and have small radius tips. The outside lower rib formation rolls 113,116 have integral mounting bosses formed on their axially outside faces to allow these rolls to locate closely to rolls 114,115. The dual disc guide rolls 101,102,103 are all of reduced axial length about the spindle 16.

A useful maintenance feature of rollforming unit 10 is the ability to lift out each of the spindle/roll assemblies from their respective sub-frames. This is possible because of the use of separate end block assemblies 72a,72b by which the spindles are supported in the side plates of the sub-frames, and by the divisible construction of yokes 30,31. As best seen in Figure 4, each yoke comprises a centre segment 170 including a boss 172 by which the yoke is mounted to its respective roll-carrying sleeve, and a pair of end segments 174,175 secured to the respective threaded sleeves or ferrules. As best seen in Figure 2, boss 172 is retained on a roller bearing 173 retained on the sleeve by a screw-fastened ring 177. Centre segments 170 and end segments 174,175 are assembled together by securing together superposed tab portions with fasteners 178.

It will be understood that the invention disclosed and defined herein extends to all alternative combinations of two or more of the individual features mentioned or evident from the text or drawings. All of these different combinations constitute various alternative aspects of the invention.

It will also be understood that the term "comprises" or its grammatical variants as used herein is equivalent to the term "includes" and is not to be taken as excluding the presence of other elements or features.

5



CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A rollforming unit, including:
- 5 a supporting body;
- a pair of guide roll means mounted in said body for rotation on respective axes, which means includes at least two cooperating pairs of guide rolls for engaging respective ribs of a ribbed formable sheet to guide the sheet through the unit;
- 15 rib formation roll means mounted for rotation in said body and located to engage a pan of the ribbed formable sheet as it passes through the unit for forming a longitudinally extending rib or ribs in the pan of increasing height, thereby causing the sheet to be tapered;
- wherein at least some of the guide rolls are slidably mounted on first spindle means and the rib formation roll means includes at least one rib formation roll slidably mounted on second spindle means;
- and wherein the unit further includes means for controllably and progressively relatively moving the slidably mounted rolls along said spindle means to accommodate the tapering of the sheet.
2. A rollforming unit according to claim 1 wherein the arrangement of said guide roll means provides support for the ribbed sheet at both sides of the or each pan engaged by said rib formation roll means.
- 25 3. A rollforming unit according to claim 2 wherein said guide roll means includes follower guide rolls rotatable on an axis displaced from said first spindle means, which follower guide rolls engage and are mounted to follow the slidably mounted guide rolls.
4. A rollforming unit according to claim 1 wherein, for tapering a sheet having three 30 ribs, there are three guide rolls, the centre one of which is axially fixed with respect to said first spindle means and the other two of which are slidably mounted on the first spindle means.

5. A rollforming unit according to claim 4, wherein said axially fixed guide roll has a cooperating guide roll mounted on a bridge extending longitudinally of the unit.

5 6. A rollforming unit to any preceding claim wherein said guide rolls are integral rolls.

7. A rollforming unit according to any one of claims 1 to 5 wherein and guide rolls are formed in plural parts e.g. a pair of discs defining between them a peripheral rib-receiving
10 groove.

8. A rollforming unit according to any preceding claim wherein there are two of said rib formation rolls for each pan of the sheet, slidably mounted on the second spindle means.

15

9. A rollforming unit according to claim 8 wherein there is a further said rib formation rolls for each pan slidably mounted on the first spindle means and cooperable with said two rib formation rolls in forming two ribs of increasing height in the sheet pan.

20 10. A rollforming unit according to any preceding claim wherein said slidably mounted rolls are slidably mounted by fixing them on respective sleeves.

11. A rollforming unit according to claim 10 wherein said sleeves extend towards one or other end of the associated spindle means.

25

12. A rollforming unit according to claim 10 and 11 wherein there is more than one slidably mounted roll to a given side of the centre point of a spindle means, and the sleeve for the innermost roll extends within the sleeve(s) for the more outer roll(s).

30 13. A rollforming unit according to any preceding claim further including respective motor-driven screw actuators for effecting sliding movement of said rolls on the spindle means.

14. A rollforming unit according to claim 13 wherein each sleeve is carried by a yoke moved in operation by a pair of said screw actuators.
- 5 15. A rollforming unit according to claim 14 wherein separate said motors are provided for the rolls of the respective spindle means, each motor being associated with a single belt drive arranged to provide the different relative speeds of the sleeves.
- 10 16. A rollforming unit according to any preceding claim wherein said rib formation roll means includes at least one rib formation roll mounted in a sub-body moveably supported on said body, and wherein means is provided to controllably and progressively move the sub-body so as to correspondingly adjust the position of at least one rib formation roll to effect the longitudinally increasing height of said rib(s) in the pan.
- 15 17. A rollforming unit according to claim 16 wherein said the sub-body is moveably supported on the body by being pivotally mounted about an axis which is substantially in the plane of travel of the ribbed sheet through the unit, whereby to minimise longitudinal displacement of the roll tips relative to the sheet with movement of the sub-body.
- 20 18. A rollforming unit, including:
a supporting body;
a pair of guide roll means mounted in said body for rotation on respective axes, which means includes at least two cooperating pairs of guide rolls for engaging respective ribs of a ribbed formable sheet to guide the sheet through the unit;
25 rib formation roll means mounted for rotation in said body and located to engage a pan of the ribbed formable sheet as it passes through the unit for forming a longitudinally extending rib or ribs in the pan of increasing height, thereby causing the sheet to be tapered;
30 wherein said rib formation roll means includes at least one rib formation roll mounted in a sub-body moveably supported on said body;

and wherein means is provided to controllably and progressively move the sub-body so as to correspondingly adjust the position of at least one rib formation roll to effect the longitudinally increasing height of said rib(s) in the pan.

- 5 19. A rollforming unit according to claim 18 wherein said sub-body is moveably supported on the body by being pivotally mounted about an axis which is substantially in the plane of travel of the ribbed sheet through the unit, whereby to minimise longitudinal displacement of the roll tips relative to the sheet with movement of the sub-body.
- 10 20. A rollforming unit to any preceding claim further including respective sets of feed and exit rolls and an associated motor for rotating these rolls and so moving the ribbed sheet through the unit.
- 15 21. A ribbed metal sheet having a plurality of longitudinally extending pans separated by ribs, wherein each pan includes a pair of longitudinally extending ribs of progressively increasing height, and wherein the sheet is of progressively decreasing width matching the increasing rib height.
- 20 22. A ribbed metal sheet according to claim 21 wherein said ribs of progressively increasing height are substantially V-shaped or triangular in cross section.
23. A ribbed metal sheet substantially as herebefore described with reference to Figure 5 of the accompanying drawings .
- 25 24. A rollforming unit substantially as herebefore described with reference to Figures 1 to 4 and 6 of the accompanying drawings.

BHP Steel.(JLA) Pty Ltd

30 by Freehills Patent Attorneys

Patent Attorneys for the Applicant

20 March 1998

6 398 59441

59441/98

1/6

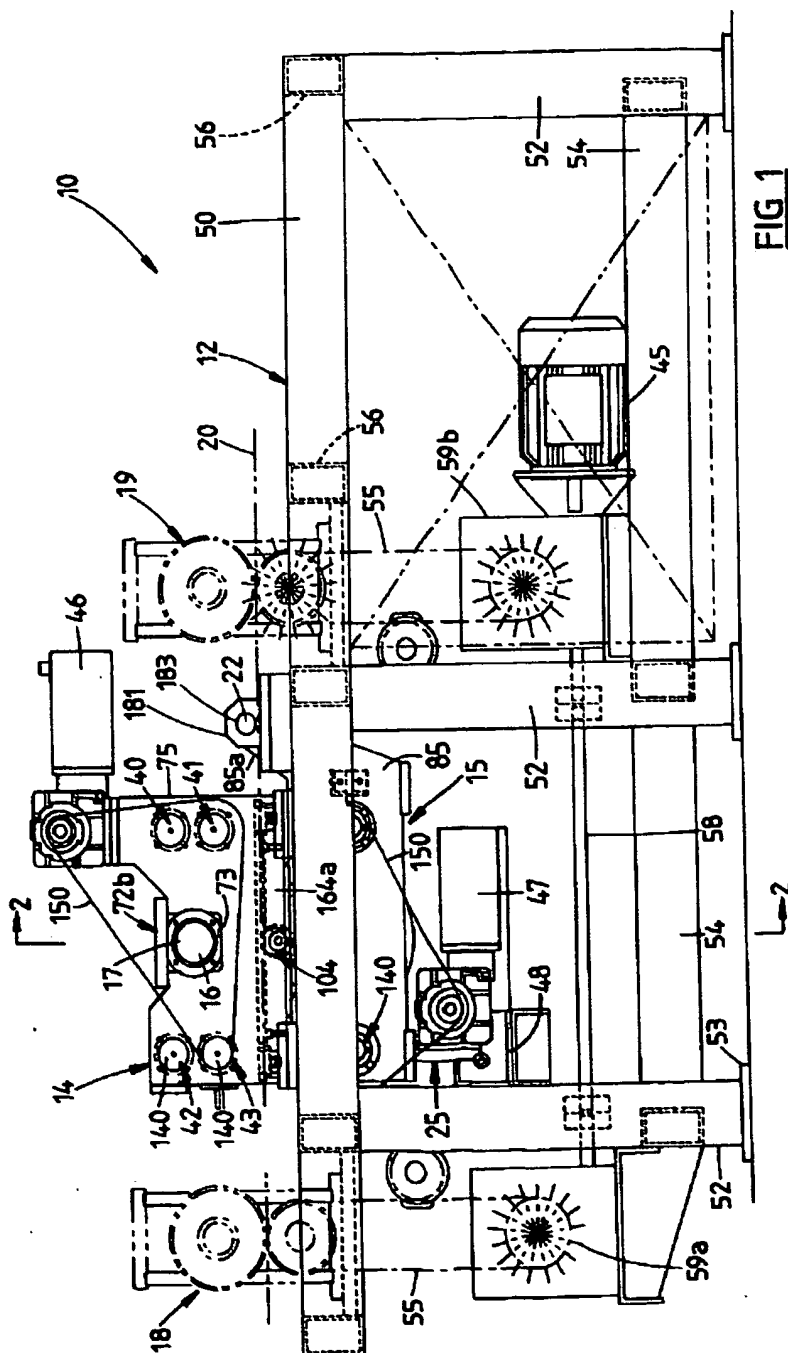


FIG. 1

0 330 53441

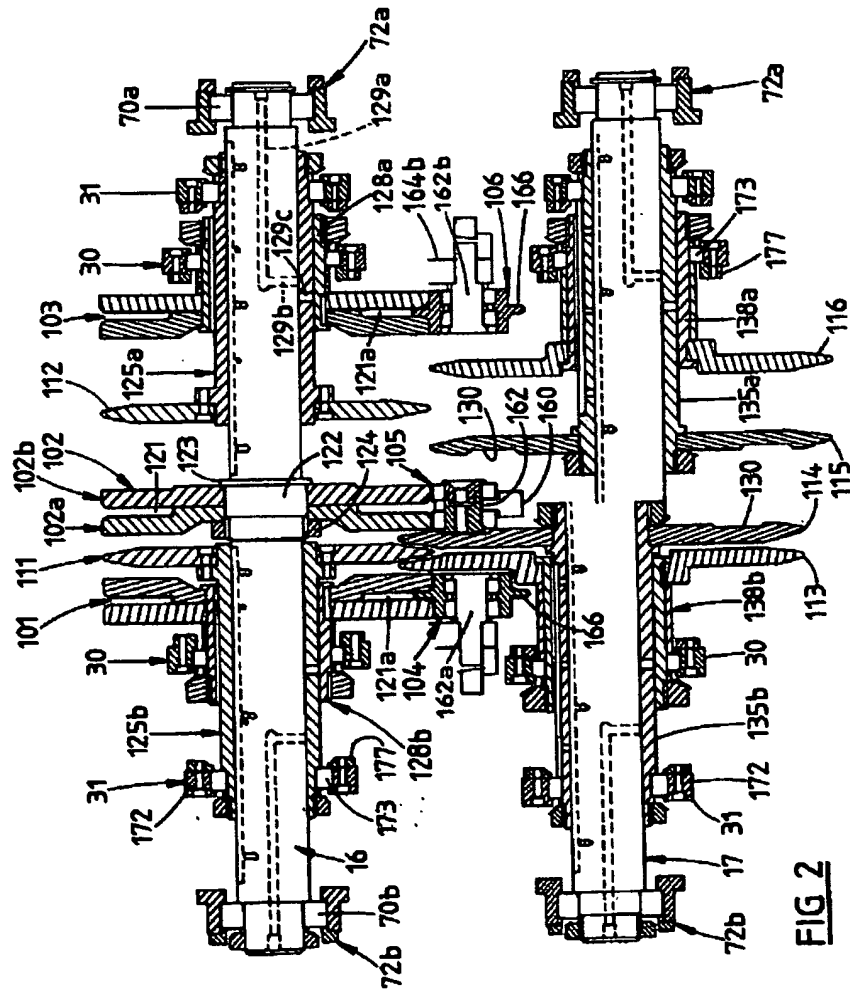


FIG 2

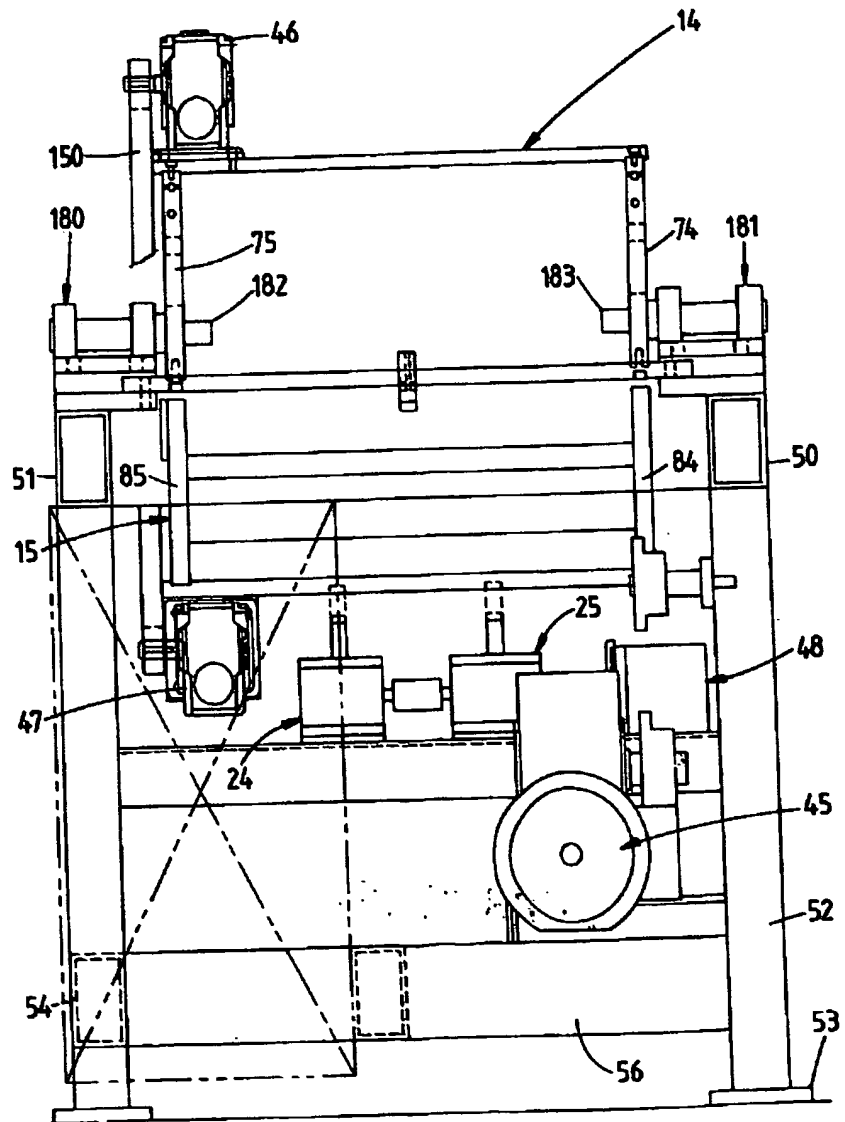


FIG 3

0 398 59441

416



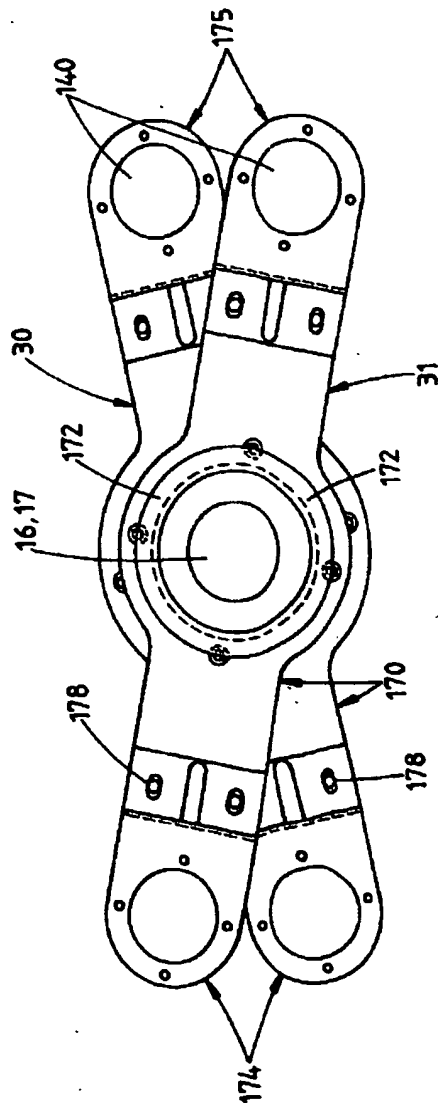


FIG 4

6 388 0341

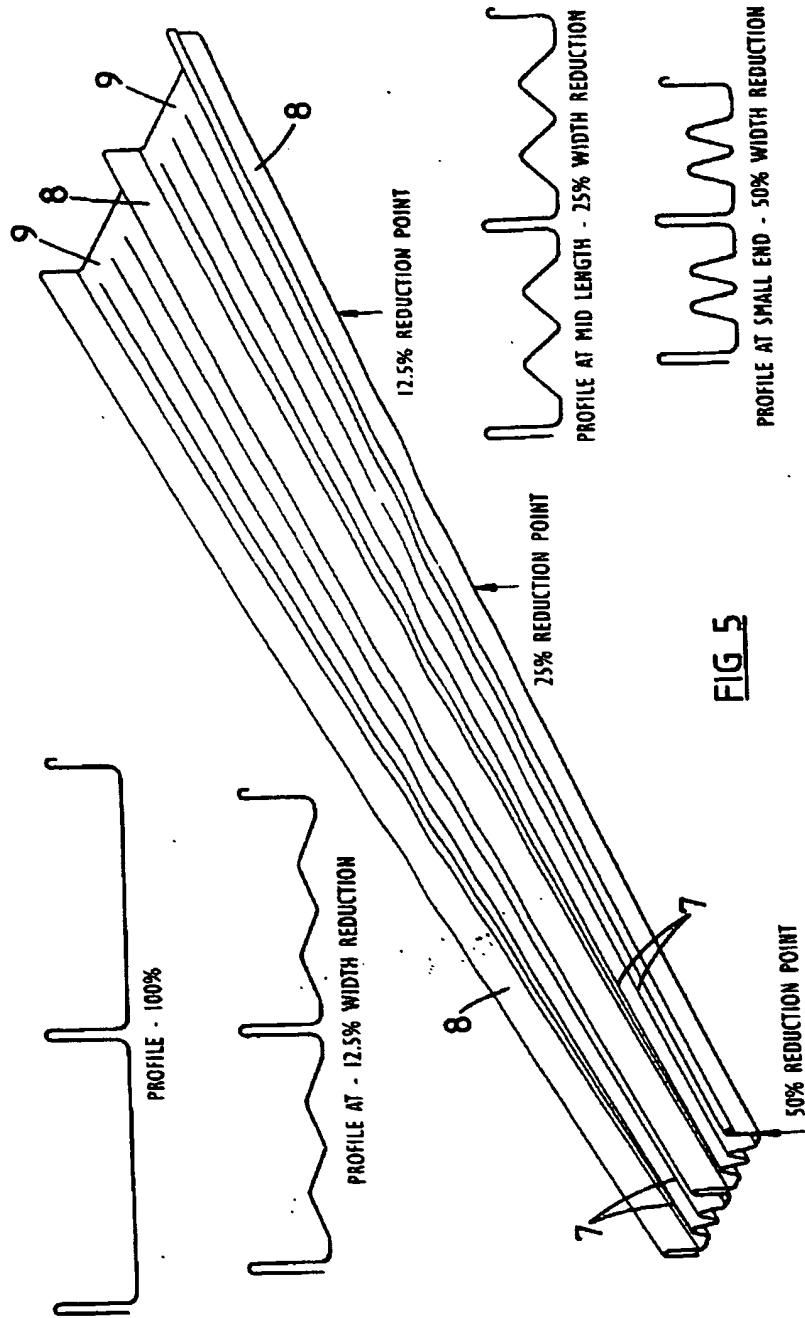

TAPER PER UNIT LENGTH AND SHEET TRAVEL THROUGH THE FORMING UNIT IS PROCESSED AND USED TO CONTROL THE RATE OF ROTATION FOR MOTOR 46, FOR EACH PASS, AND IN BOTH DIRECTIONS OF SHEET TRAVEL.

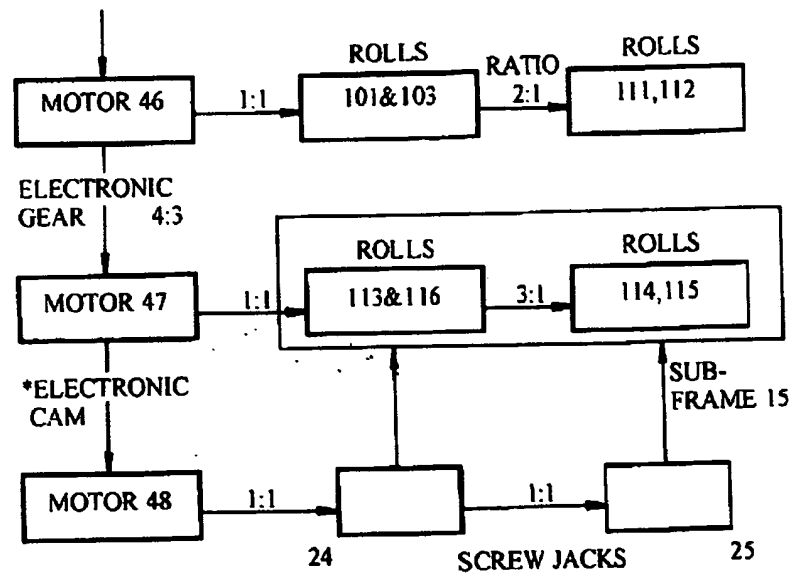

*BASED ON TABLE DERIVED FROM FORMING GEOMETRY

FIG 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.